



45

NATIONAL INSTITUTE OF TECHNOLOGY, ARUNACHAL PRADESH
(An Institute of National Importance under Ministry of Education (ShikshaMantralaya),
Government of India
JOTE, ARUNACHAL PRADESH -791113, INDIA
Fax: 0360 - 2284972, E-mail: nitarunachal@nitap.ac.in
https://www.nitap.ac.in

NOTICE INVITING QUOTATION

NIT/AP/Engg.Cell-17/Signage Board/2024-25/

Date:- 10.10.2024

National Institute of Technology Arunachal Pradesh invites sealed quotation from the reputed agencies/contractors/vendors for as per the enclosed schedule. The quotations shall be received in the Engineering Cell, Block-IV of NIT-Arunachal Pradesh on or before **01.11.2024** at 1400 Hrs and shall be opened on the same day at **1430 Hrs** at Engineering Cell, NIT-Arunachal Pradesh. The intending contractor or their authorized representative may present during the opening.

Sl. No	Name of Work
1.	Drainage work around Main Gate Entrance at NIT A.P Jote

As per Schedule attached

Term and Condition:-

1. The work shall be carried out as per CPWD general specification for civil works amended upto date and as per the instructions of the Engineer-In-Charge.
2. All the documents submitted shall be sealed and signed by the bidder.
3. The bidder shall submit firm valid registration certificate, bank detail, PAN card and GST registration certificate along with the quotation.
4. The work is of urgent nature and is to be completed within 30 days from the issue of work order.
5. The quantities mentioned in the schedule are tentative only.
6. The rates shall be quoted on the enclosed schedule/quotation only.
7. The Rate quoted shall be inclusive of all taxes, levies & cess etc. and provisions of safety & welfare of labours as per the extent rules. No extra/compensation on any account shall be borne by NIT-Arunachal Pradesh.
8. Conditional quotations shall be rejected.
9. No T&P shall be provided by NIT-Arunachal Pradesh.
10. The payment shall be made as per the actual measurement.
11. Applicable TDS will be deducted as per the Government notification issued time to time.


Registrar (i/c)
National Institute of Technology
Arunachal Pradesh, Jote

Copy to:-

1. Website of NIT-Arunachal Pradesh
2. Notice Board of NIT-Arunachal Pradesh

कुलसचिव/Registrar
राष्ट्रीय प्रौद्योगिकी संस्थान, अरुणाचल प्रदेश
National Institute of Technology
Arunachal Pradesh, Jote

BOQ for Civil Work

Name of the Work:- Drainage Work Around Main Gate Entrance at NIT A.P Jote

Sl. No	Item Description	Qty considered for Tender	Unit	Rate	Cost
1	Earthwork				
	Earth work in excavation by mechanical means (Hydraulic excavator) manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including getting out and disposal Of excavated earth lead upto 50 m and for all lift, as directed by Engineer-in-charge. 2.6.1 All kinds Of soil				
1a	drainage	32	cu.m		
1b	Back fill				
	Filling available excavated earth (excluding rock) In trenches, plinth, Sides of foundations etc. in layers not exceeding 20cm in depth, consolidating each deposited layer by ramming and watering.				
	drainage	20	cu.m		
2	PCC (1:4:8)				
	(1 Cement : 4 coarse sand (zone-III) derived from natural sources : 8 graded stone aggregate 40 mm nominal size derived from natural sources)				
	Drainage	3	cu.m		
3	RCC (M20)				
	Reinforced cement concrete work in walls (any thickness), including attached pilasters, buttresses, plinth and string courses, fillets, columns, pilars. piers. abutments, posts and struts etc. above plinth level up to floor five level, excluding cost Of centering, shuttering, finishing and reinforcement : 5.22 (1 cement : 1.5 coarse sand(zone-III) derived from				
	Drainage	11	cu.m		


BOQ for Civil Work

Name of the Work:- Drainage Work Around Main Gate Entrance at NIT A.P Jote

Sl. No	Item Description	Qty considered for Tender	Unit	Rate	Cost
4	Reinforcement Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level. 522.4 Hot rolled deformed bars				
	drainage	700	kg.		
5	Shuttering Centring and shuttering including strutting propping etc. and removal Of form work for: a) Foundations and plinth, b) Walls ineuding attached buttresses, pilasters etc. c) Columns, pillars and piers, Since in item Nos, 9(a) to (c), the material can be used 8 times, the quantity is taken as 118th Of required quantity.				
	drainage	126	Sq.m		
6	Cover over Drain Structural steel work in single section, fixed with or without connecting plate. including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete.				
	ISMC 100X50X7.5mm@9.2kg/m				
	ISMC 150X75X9@16.4				
		600	kg		

(Rupees.....)

Seal & Sign of Bidder

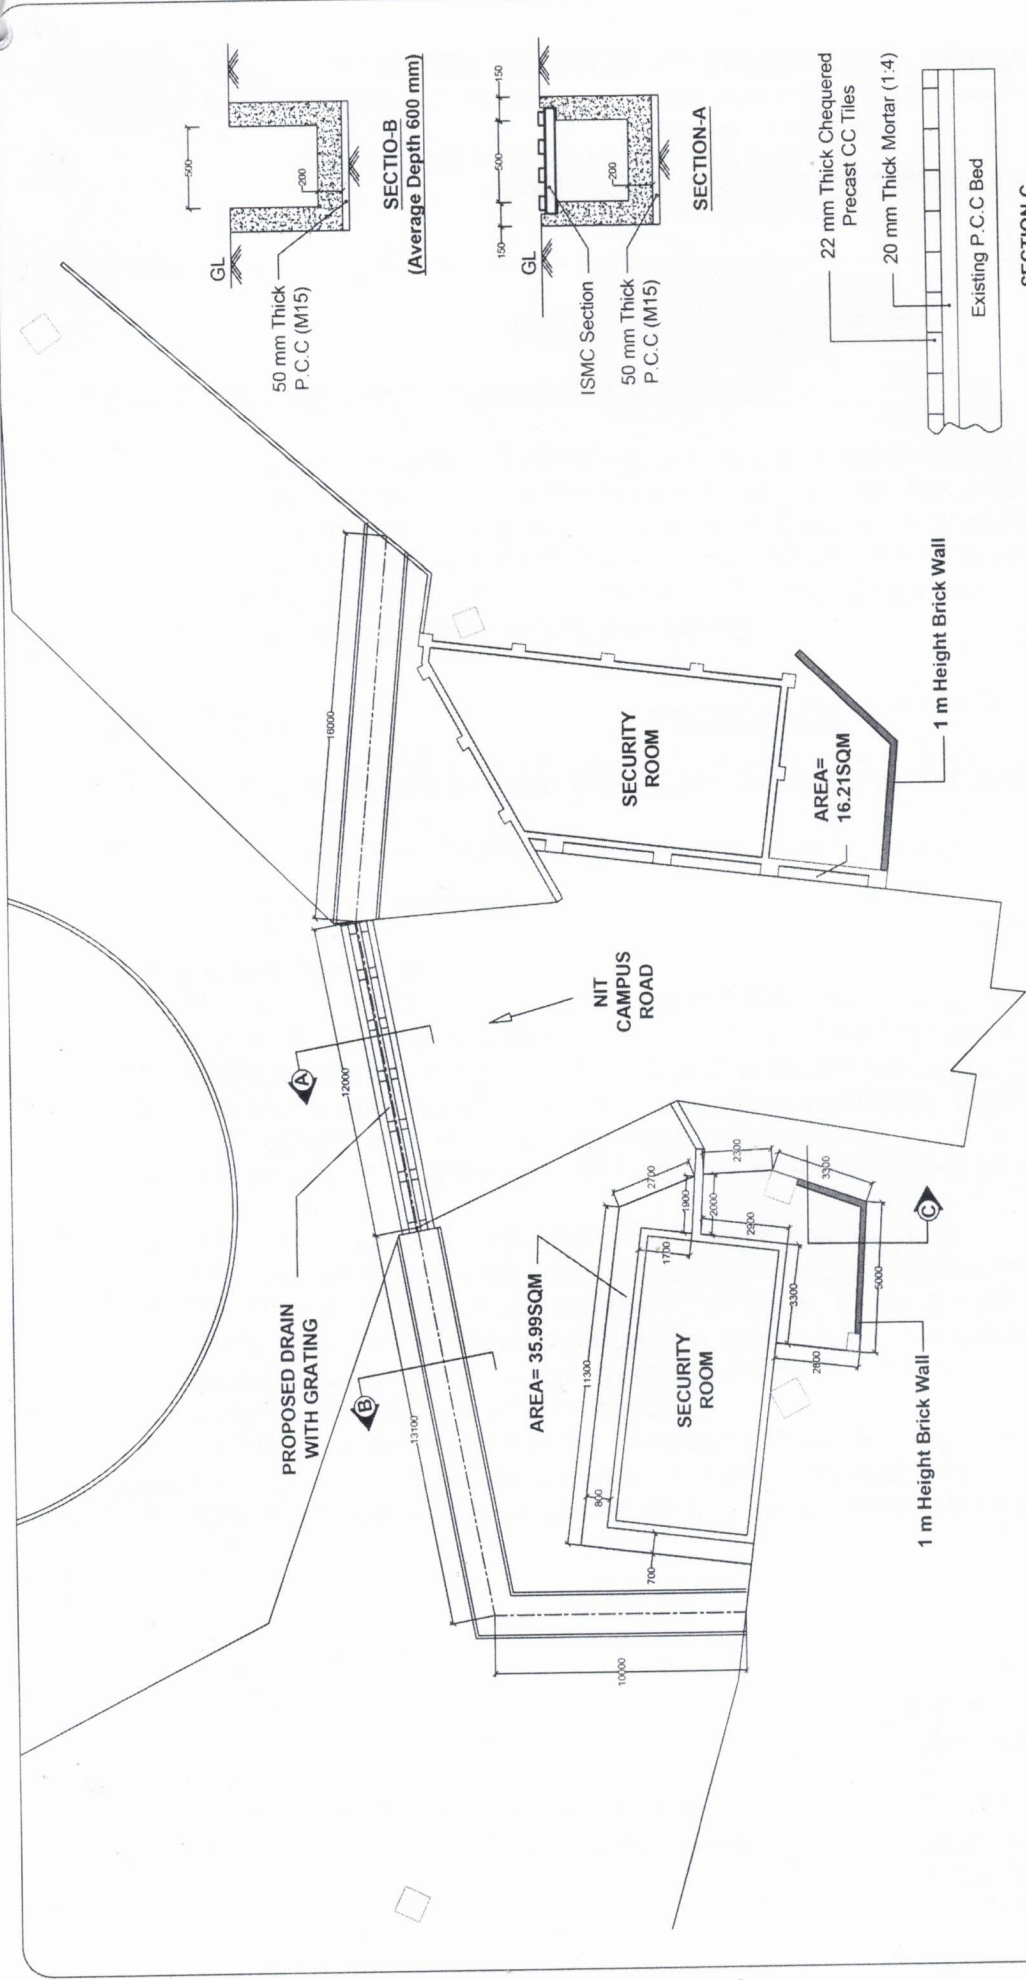

FOR TENDER PURPOSE ONLY

PROJECT NAME:	NATIONAL INSTITUTE OF TECHNOLOGY ARUNACHAL PRADESH FIXATION OF SIGNAGE BOARD
DRAWING TITLE:	Miscellaneous Detail
DESIGNER:	AKD
CHECKER:	
APPROVED:	MM
DATE:	30/09/2024

REV	DESCRIPTION	BY	DATE

GENERAL NOTES